

Thank you for purchasing the Dayton Audio® WBA51 Bluetooth and Network Audio Receiver with IR Remote.


The WBA51 Bluetooth and Network Audio Receiver features:

- Wi-Fi multi-room audio, Airplay and DLNA
- Bluetooth audio
- Ethernet port for wired network connection
- 3.5mm audio line input
- Analog and optical audio outputs

WBA51 Functions:


- 1. Mode button: Select input source mode
- 2. Mode display: LED indicates audio source mode
- 3. Line input: 3.5mm input for use with most audio sources
- 4. Line output: 3.5mm output for connection to amplifier
- 5. Optical output: Digital audio output
- 6. WPS: For use with WPS Wi-Fi network
- 7. Power button: Power device on/off
- 8. Ethernet port

WBA51



Remote Control Functions:

- 1. Power
- 2. Mode
- 3. Volume and +
- 4. Back-Play/Pause-Forward
- 5. 6 preset recall buttons



Getting Started

Power on receiver by connecting the micro USB power cable.

Press the mode button "M" on receiver or remote control to select the audio source mode.

Wi-Fi mode: Wireless Multi-Room Audio

- 1. Download and install the Hi-Fly app by scanning below QR code, or search "Hi-Fly" in the app store/ Google Play store.
- 2. Follow the setup instructions in the Hi-Fly app to connect device to your network.


Hi-Fly iOS app



Hi-Fly Android app



Scan to download for iOS. Scan to download for Android.

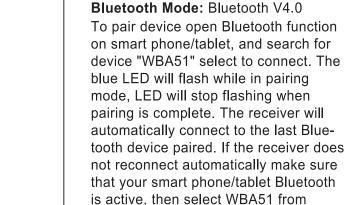

Line Input Mode:

Bluetooth device list.

1. Connect audio source to the 3.5mm input.

Playback Support

- Airplay/DLNA Wi-Fi audio streaming
- Multi-room playback control with Hi-Fly app
- Lossless audio format supported (WAV, FLAC, APE, AAC)



daytonaudio.com tel + 937.743.8248 info@daytonaudio.com

705 Pleasant Valley Dr. Springboro, OH 45066

5-Year Limited Warranty

See daytonaudio.com for details



Dayton Audio®

Last Revised: 1/26/2021

5